

Transient Voltage Suppressors (TVS) Data Sheet

Features

- Glass passivated junction
- Low zener impedance
- Excellent clamping capability
- 5000W peak pulse power capability at 10/1000µs waveform, repetition rate (duty cycle):0.01%
- Fast response time
- Typical I_R less than 1µA above 11V.
- Plastic package has underwriters laboratory flammability 94V-0
- Meets MSL level 1, per J-STD-020.
- AEC-Q101 Qualified

Mechanical Data

- Case: JEDEC DO-214AB Moulded plastic
- Terminal: solderplated, solderable per MIL-STD-750, Method 2026
- Polarity: Color band denotes cathode except bi-directional models
- Mounting Position: Any

Applications

- I/O interface
- AC/DC power supply
- Low frequency signal transmission line (RS232, RS485, etc.)

Maximum Ratings and Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Rating	Symbol	Value	Units
Peak pulse power dissipation at 10/1000µs waveform (Note1, Fig.1)	P_{PPM}	Minimum 5000	Watts
Peak pulse current of at 10/1000µs waveform (Note 1, Fig.3)	I_{PPM}	See Table	Amps
Steady state power dissipation at $T_L=75^\circ\text{C}$ (Fig.4)	$P_{M(AV)}$	6.5	Watts
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load, (JEDEC Method) (Note2)	I_{FSM}	300	Amps
Operating junction and Storage Temperature Range.	T_J, T_{STG}	-55 to +150	°C
Typical thermal resistance junction to lead	$R_{\theta JL}$	15	°C/W
Typical thermal resistance junction to ambient	$R_{\theta JA}$	75	°C/W

Notes: 1. Non-repetitive current pulse, per Fig.3 and derated above $T_A=25^\circ\text{C}$ per Fig.2.

2. 8.3ms single half sine-wave, or equivalent square wave, duty cycle=4 pulses per minutes maximum.

Dimensions (DO-214AB/SMC)

Symbol	Millimeters		Inches	
	Min.	Max.	Min.	Max.
L	6.60	7.71	0.260	0.280
D	5.59	6.22	0.220	0.245
D1	2.9	3.20	0.114	0.126
T	7.75	8.13	0.305	0.320
T1	0.76	1.52	0.030	0.060
d	-	0.20	-	0.008
H	2.06	2.62	0.079	0.103


Electrical Characteristics (TA=25°C)

Part Number		Device Marking Code		Reverse Stand-Off Voltage	Breakdown Voltage @I _T	Test Current	Maximum Clamping Voltage @ I _{PP}	Peak Pulse Current	Reverse Leakage @V _{RWM}
Unidirectional	Bidirectional	UNI	BI	V _{RWM} (V)	V _{BR} (V)	I _T (mA)	V _C (V)	I _{PP} (A)	I _R (μA)
5.0SMDJ11A-AR	5.0SMDJ11CA-AR	5PEN	5BEN	11.0	12.2~13.5	10	18.2	274.7	800
5.0SMDJ12A-AR	5.0SMDJ12CA-AR	5PEP	5BEP	12.0	13.3~14.7	10	19.9	251.3	800
5.0SMDJ13A-AR	5.0SMDJ13CA-AR	5PEQ	5BEQ	13.0	14.4~15.9	10	21.5	232.6	500
5.0SMDJ14A-AR	5.0SMDJ14CA-AR	5PER	5BER	14.0	15.6~17.2	10	23.2	215.5	200
5.0SMDJ15A-AR	5.0SMDJ15CA-AR	5PES	5BES	15.0	16.7~18.5	1	24.4	204.9	100
5.0SMDJ16A-AR	5.0SMDJ16CA-AR	5PET	5BET	16.0	17.8~19.7	1	26.0	192.3	50
5.0SMDJ17A-AR	5.0SMDJ17CA-AR	5PEU	5BEU	17.0	18.9~20.9	1	27.6	181.2	20
5.0SMDJ18A-AR	5.0SMDJ18CA-AR	5PEV	5BEV	18.0	20.0~22.1	1	29.2	171.2	10
5.0SMDJ20A-AR	5.0SMDJ20CA-AR	5PEW	5BEW	20.0	22.2~24.5	1	32.4	154.3	5
5.0SMDJ22A-AR	5.0SMDJ22CA-AR	5PEX	5BEX	22.0	24.4~26.9	1	35.5	140.8	5
5.0SMDJ24A-AR	5.0SMDJ24CA-AR	5PEZ	5BEZ	24.0	26.7~29.5	1	38.9	128.5	5
5.0SMDJ26A-AR	5.0SMDJ26CA-AR	5PFE	5BFE	26.0	28.9~31.9	1	42.1	119.0	5
5.0SMDJ28A-AR	5.0SMDJ28CA-AR	5PFG	5BFG	28.0	31.1~34.4	1	45.4	110.0	5
5.0SMDJ30A-AR	5.0SMDJ30CA-AR	5PFK	5BFK	30.0	33.3~36.8	1	48.4	103.0	5
5.0SMDJ33A-AR	5.0SMDJ33CA-AR	5PFM	5BFM	33.0	36.7~40.6	1	53.3	93.9	5
5.0SMDJ36A-AR	5.0SMDJ36CA-AR	5PFP	5BFP	36.0	40.0~44.2	1	58.1	86.1	5
5.0SMDJ40A-AR	5.0SMDJ40CA-AR	5PFR	5BFR	40.0	44.4~49.1	1	64.5	77.6	5
5.0SMDJ43A-AR	5.0SMDJ43CA-AR	5PFT	5BFT	43.0	47.8~52.8	1	69.4	72.1	5
5.0SMDJ45A-AR	5.0SMDJ45CA-AR	5PFV	5BFV	45.0	50.0~55.3	1	72.7	68.8	5
5.0SMDJ48A-AR	5.0SMDJ48CA-AR	5PFX	5BFX	48.0	53.3~58.9	1	77.4	64.7	5
5.0SMDJ51A-AR	5.0SMDJ51CA-AR	5PFZ	5BFZ	51.0	56.7~62.7	1	82.4	60.7	5

Electrical Characteristics (TA=25°C)

Part Number		Device Marking Code		Reverse Stand-Off Voltage	Breakdown Voltage @IT	Test Current	Maximum Clamping Voltage @ I _{PP}	Peak Pulse Current	Reverse Leakage @ V _{RWM}
Unidirectional	Bidirectional	UNI	BI	V _{RWM} (V)	V _{BR} (V)	I _T (mA)	V _C (V)	I _{PP} (A)	I _R (μA)
5.0SMDJ54A-AR	5.0SMDJ54CA-AR	5PGE	5BGE	54.0	60.0~66.3	1	87.1	57.5	2
5.0SMDJ58A-AR	5.0SMDJ58CA-AR	5PGG	5BGG	58.0	64.4~71.2	1	93.6	53.5	2
5.0SMDJ60A-AR	5.0SMDJ60CA-AR	5PGK	5BGK	60.0	66.7~73.7	1	96.8	51.7	2
5.0SMDJ64A-AR	5.0SMDJ64CA-AR	5PGM	5BGM	64.0	71.1~78.6	1	103.0	48.6	2
5.0SMDJ70A-AR	5.0SMDJ70CA-AR	5PGP	5BGB	70.0	77.8~86.0	1	113.0	44.3	2
5.0SMDJ75A-AR	5.0SMDJ75CA-AR	5PGR	5BGR	75.0	83.3~92.1	1	121.0	41.4	2
5.0SMDJ78A-AR	5.0SMDJ78CA-AR	5PGT	5BGT	78.0	86.7~95.8	1	126.0	39.7	2
5.0SMDJ85A-AR	5.0SMDJ85CA-AR	5PGV	5BGV	85.0	94.4~104	1	137.0	36.5	2
5.0SMDJ90A-AR	5.0SMDJ90CA-AR	5PGX	5BGX	90.0	100~111	1	146.0	34.3	2
5.0SMDJ100A-AR	5.0SMDJ100CA-AR	5PGZ	5BGZ	100.0	111~123	1	162.0	30.9	2
5.0SMDJ110A-AR	5.0SMDJ110CA-AR	5PHE	5BHE	110.0	122~135	1	177.0	28.3	2
5.0SMDJ120A-AR	5.0SMDJ120CA-AR	5PHG	5BHG	120.0	133~147	1	193.0	26.0	2
5.0SMDJ130A-AR	5.0SMDJ130CA-AR	5PHK	5BHK	130.0	144~159	1	209.0	24.0	2
5.0SMDJ140A-AR	5.0SMDJ140CA-AR	5PHL	5BHL	140.0	155~171	1	227.0	22.0	2
5.0SMDJ150A-AR	5.0SMDJ150CA-AR	5PHM	5BHM	150.0	167~185	1	243.0	20.6	2
5.0SMDJ160A-AR	5.0SMDJ160CA-AR	5PHP	5BHP	160.0	178~197	1	259.0	19.3	2
5.0SMDJ170A-AR	5.0SMDJ170CA-AR	5PHR	5BHR	170.0	189~209	1	275.0	18.2	2


Recommended Soldering Conditions

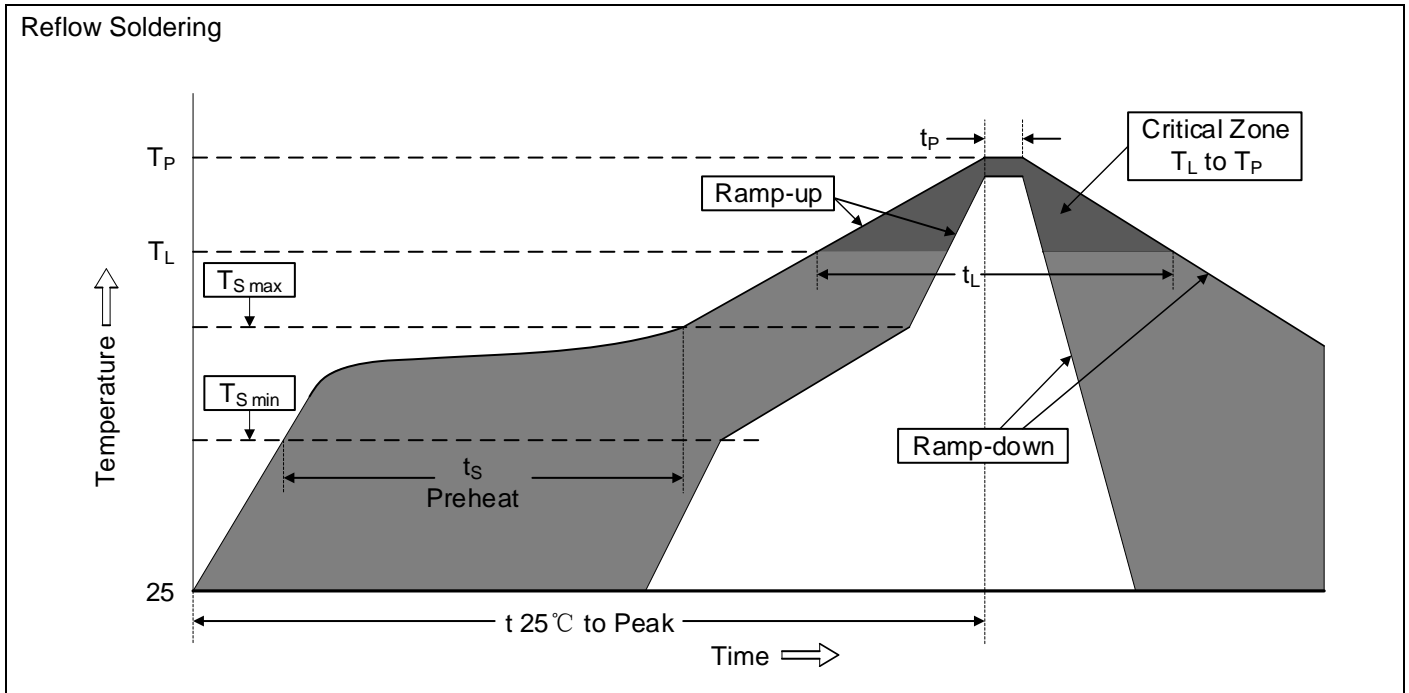

Recommended Conditions

Profile Feature	Pb-Free Assembly
Average ramp-up rate (T_L to T_P)	3°C/second max.
Preheat	
-Temperature Min ($T_{S\ min}$)	150°C
-Temperature Max ($T_{S\ max}$)	200°C
-Time (min to max) (t_s)	60-180 seconds
$T_{S\ max}$ to T_L	
-Ramp-up Rate	3°C/second max.
Time maintained above:	
-Temperature (T_L)	217°C
-Time (t_L)	60-150 seconds
Peak Temperature (T_P)	260°C
Time within 5°C of actual Peak Temperature (t_p)	20-40 seconds
Ramp-down Rate	6°C/second max.
Time 25°C to Peak Temperature	8 minutes max.

Partnumber code

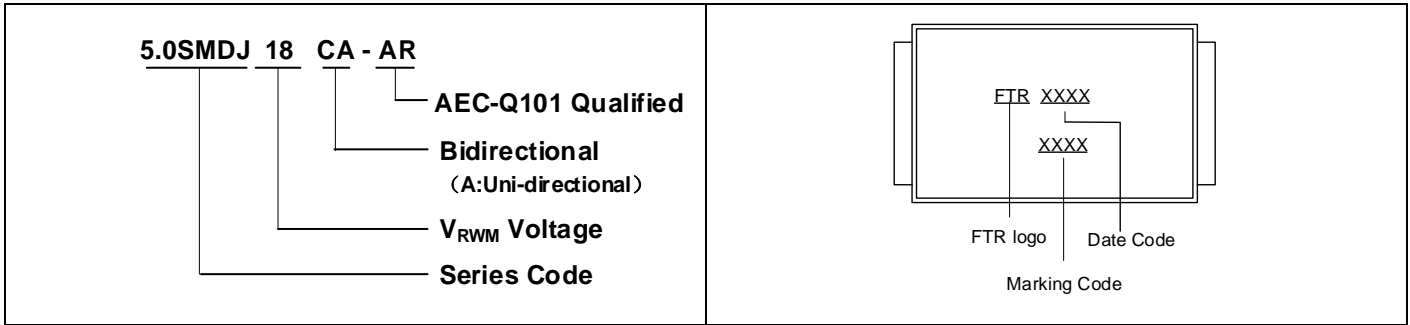

Ratings and Characteristic Curves ($T_A=25^\circ\text{C}$ unless otherwise noted)

Figure 1. Peak Pulse Power Rating Curve

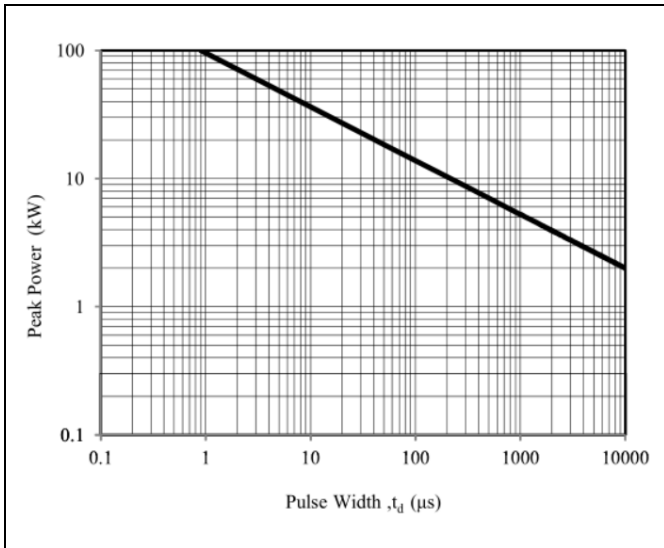


Figure 2. Pulse Derating Curve

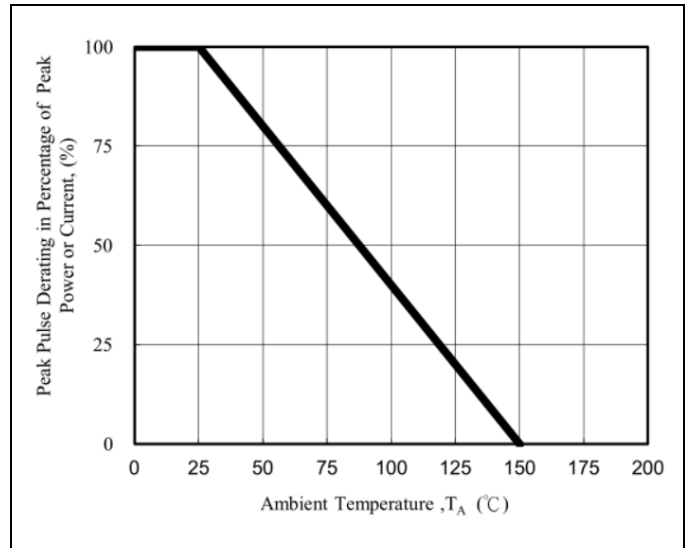


Figure 3. Pulse Waveform




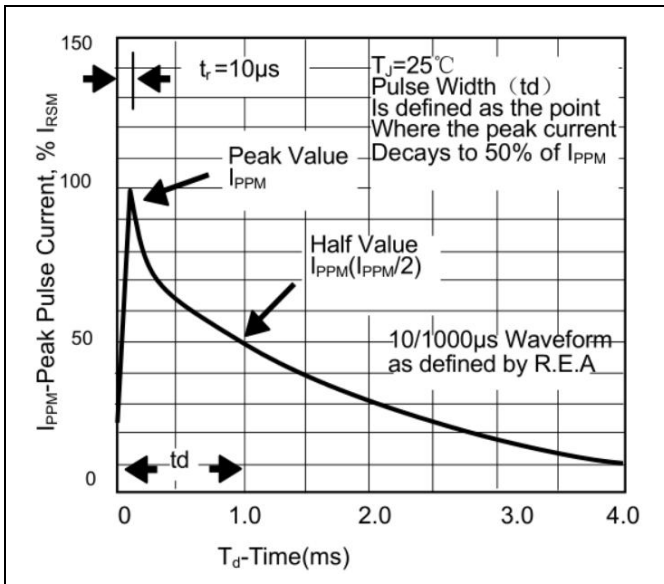


Figure 4. Steady State Power Dissipation Derating Curve

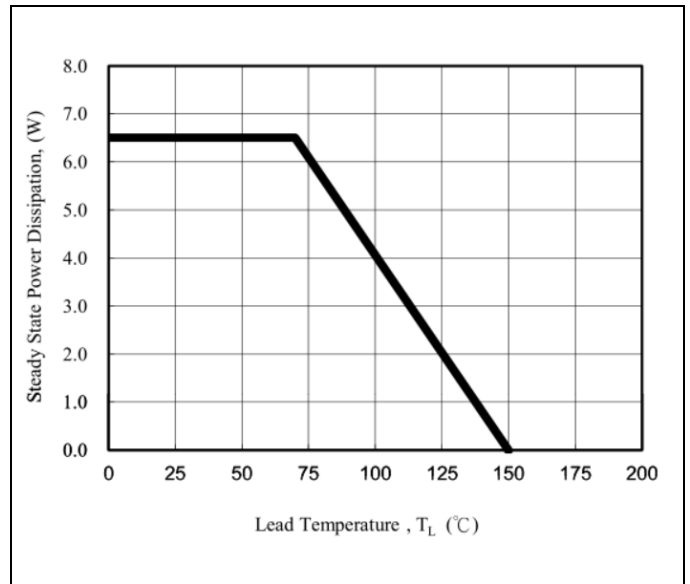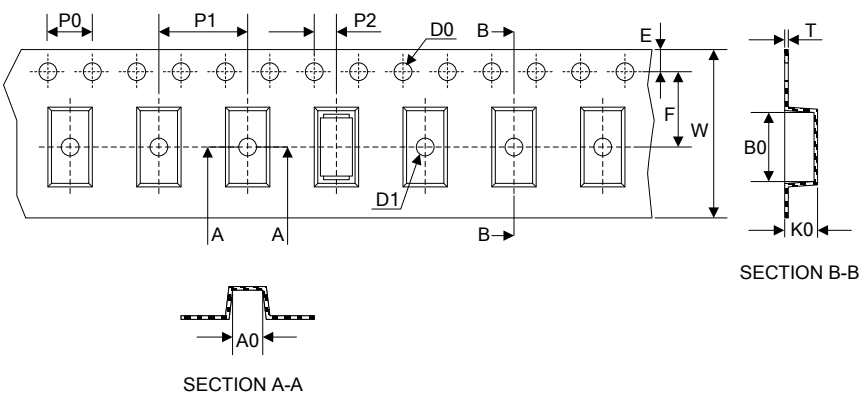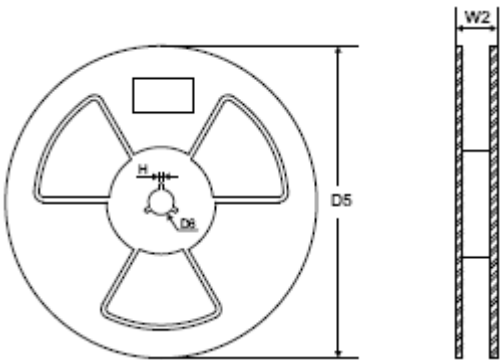

Packaging

Tape	Symbol	Dimension (mm)	
	W	16.00±0.10	
	P0	4.00±0.10	
	P1	8.00±0.10	
	P2	2.00±0.10	
	D0	Φ1.55±0.10	
	E	1.75±0.10	
	F	7.50±0.10	
	A0	6.05±0.1	
	B0	8.31±0.1	
	K0	2.54±0.1	
	T	0.25±0.1	
	<p data-bbox="103 1048 167 1079">Reel</p> 	D5	Φ330.0±2.0
		D6	Φ13.5±0.5
		H	2.5±1.0
		W2	20.0±2.0
Quantity: 3000PCS			